

Design of Multislot Dual Band Patch Antenna for Satellite Communications

Ms.Sayali Dixit, Mrs.Shamala Mahadik

¹ Dr.J.J.Magdum College of Engineering, Jaysingpur, India

² Dr.J.J.Magdum College of Engineering, Jaysingpur, India

Abstract

This paper gives configuration and analysis of dual band slotted patch antenna. For resonance purpose antenna is loaded with rectangular slots. Microstrip feed line is used to feed the antenna. Antenna characteristics were simulated using full-wave electromagnetic simulator (IE3D). According to simulations, the proposed antenna can provide two separated impedance bandwidths of 1.05 GHz (about 12.96% centered at 8.1 GHz) and 1.55 GHz (about 16.45% centered at 9.422 GHz), satisfying VSWR, and stable radiation patterns for satellite communications.

Keywords: *Microstrip Antenna, Return Loss, VSWR*

1. Introduction

Due to the rapid development in the field of satellite and wireless communication there has been a great demand for low cost minimal weight, compact low profile antennas that are capable of maintaining high performance over a large spectrum of frequencies. Through the years, microstrip antenna structures are the most common option used to realize millimeter wave monolithic integrated circuits for microwave, radar and communication purposes. Using the Dual Band Microstrip Antenna concept in this thesis dual band rectangular Microstrip antenna is designed simulated and tested. There are a few softwares available which allow the optimization of the antenna. IE3D is one of the most imperial electromagnetic software which allows to solving for radio and microwave application.

A Microstrip patch antenna consists of a radiating patch on one side of a dielectric substrate which has a ground plane on the other side. Micro strip antennas are planar resonant cavities that leak from their edges and radiate. Printed circuit techniques can be used to etch the

antennas on soft substrates to produce low-cost and repeatable antennas in a low profile.

2. Proposed Antenna Design & Optimizations

The Performance of the micro strip antenna depends on its dimension. Depending on the dimension the operating frequency, return loss and other related parameters are also influenced.

2.1 Design specifications:

Frequency of operation:

1. 7.84-8.81 GHz centered at 8.11GHz
2. 9.18-10.10GHz centered at 9.42 GHz

Height of dielectric substrate: 1.588mm

Dielectric constant: 4.4

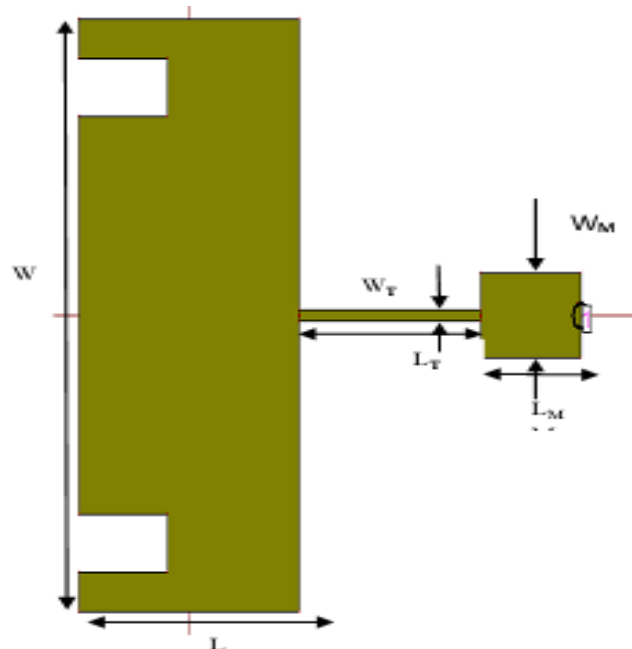


Fig. 1. Proposed antenna.

Parameter	Dimension (mm)	Optimized Dimension (mm)
L	6.58	6.5
W	11.25	11.2
L _T	5.6	5.6
W _T	0.3	0.3
L _M	3	3
W _M	1.623	1.6
L _S	2.632	2.6
W _S	0.98	0.9

3. Results

The software used to model and simulate the Micro strip patch antenna is Zealand Inc's IE3D. IE3D is a full-wave electromagnetic simulator based on the method of moments. It can be used to calculate and Return loss plot, VSWR, radiation patterns etc.

3.1 Return Loss:

The center frequencies are selected as the one at which the return loss is minimum. Return loss values obtained at 8.12GHz and 9.422GHz are -17dB and -44dB respectively.

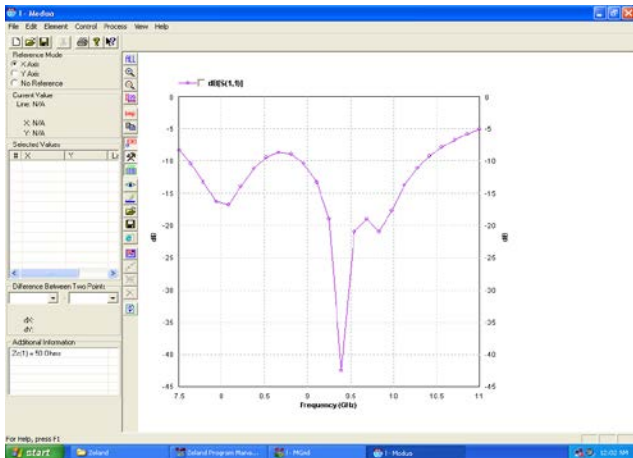


Fig. 2 Simulated results.

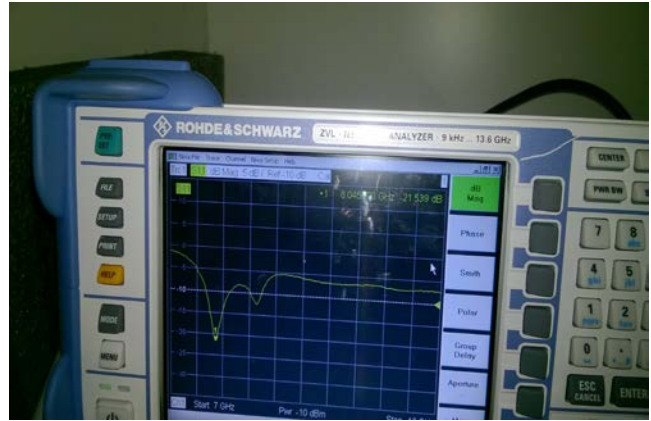


Fig. 2. Tested Hardware Results.

3.2 VSWR:

VSWR values are 1.26dB and 1.2 dB at 8.12GHz and 9.422GHz respectively.

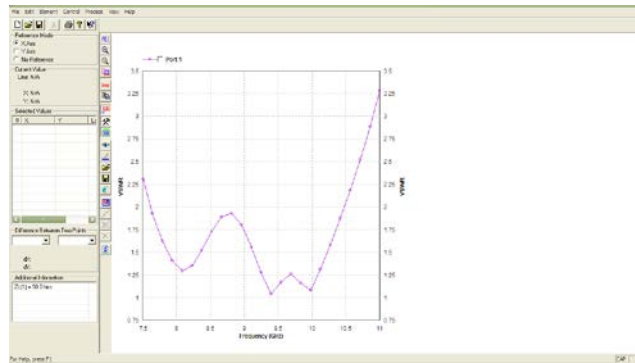


Fig. 3 Simulated results

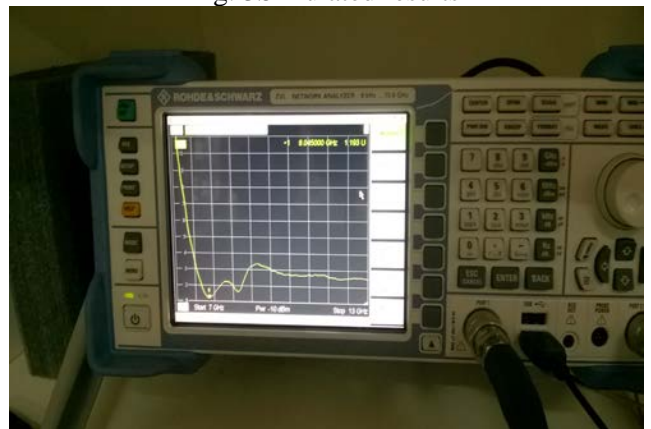


Fig. 4. Tested Hardware Results.

4. Conclusions

The antenna is designed and fabricated successfully with VSWR < 2 and two bandwidths 12.96% (centered at 8.1 GHz) and 1.55 GHz (about 16.45% centered at 9.422 GHz). $\lambda/4$ transformer was successfully designed for matching purpose.

References

- [1] Dual-Band Multislot patch antenna for wireless applications, Md. Samsuzzman, Mohammad Tariqul Islam, Mohammad Rashed Iqbal Faruque.
- [2] R.Garg, Microstrip Antenna Design Handbook Norwood U.S.A: Artech House, 2001.
- [3] 'Analysis and design of a dual band Microstrip antenna' Xianwei Yu, Zenghi Yang, Qunsheng Cao
- [4] 'Design of a compact dual band micro strip antenna for Ku-band application', Misran, N., Yousob, Mobashsher
- [5] 'Reconfigurable dual band Micro strip patch antenna for Software Defined Radio Applications', tekin, knox, M
- [6] 'Compact Dual Slotted Micro strip Antenna for IEEE 802.11b Applications', Mayank Dwivedi, Vinod kumar Mandeep singh Saini.
- [7] 'Aperture Coupled Microstrip Antenna for Dual-Band', Rajesh Kumar Vishwakarma, Sanjay Tiwari
- [8] A Dual-Band Antenna for WLAN Applications by Rectangular Patch with 4-Bridges, Chang won Jung, Franco De Flaviis
- [9] 'Single Layer Dual Band Micro strip Patch Antenna Using Probe feed' Tej Raj Brijlata Chauhan
- [10] 'Design, Analysis and modeling of dual Band Microstrip Loop Antenna Using Defective Ground

Ms. Sayali Dixit has completed B.E (Electronics and telecommunications) with first class from Shivaji University and she is pursuing M.E (Electronics and telecommunications) from Dr. J.J. Magdum College of engineering, Jaysingpur, Tal-shirol,

Prof. Mrs. S.R. Mahadik Is pursuing PhD in Active Microstrip antennas from Shivaji University Kolhapur. She has completed her M.E (Electronics & Communications) from K.I.T college of engineering Kolhapur, Maharashtra, India. She is working as a Associate professor at Dr. J.J. Magdum College of Engineering, Jaysingpur, Tal-Shirol, Dist- Kolhapur. She has a huge Teaching experience of 24 years.